



# 中實長爪行程夾頭

## LONG JAW STROKE POWER CHUCK

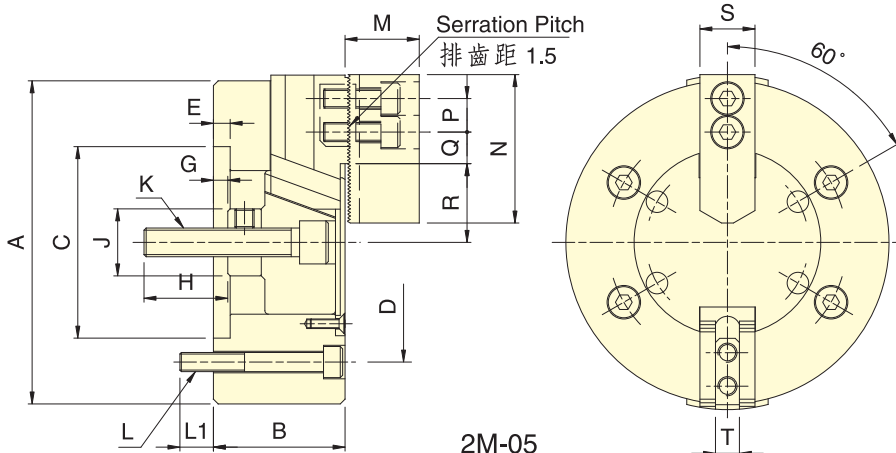

2M-05

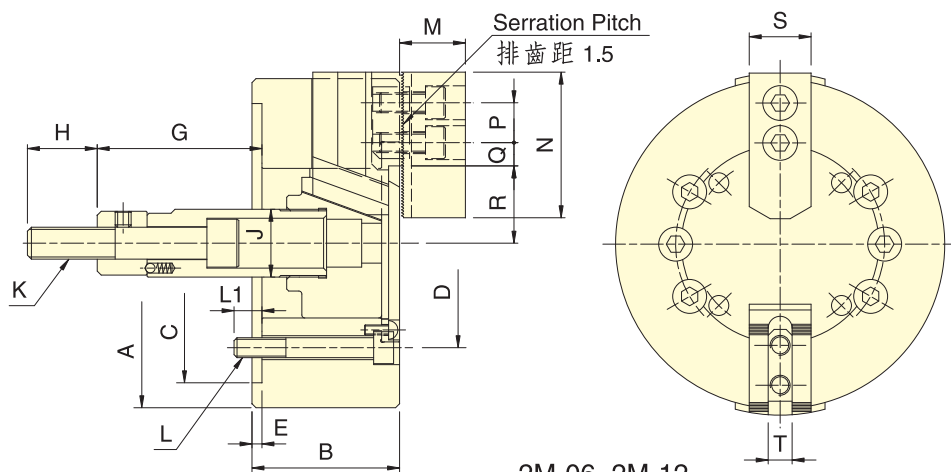

2M-06~2M-12

保留規格修改的權利  
Subject to technical changes.

規格 Spec. 型號 Model	楔心行程 mm Plunger stroke	爪行程(直徑) mm Jaw stroke(Dia.)	夾持直徑 Chucking Dia. mm 最大 Max. 最小 Min.	容許油壓缸推力 kN(kgf) Max. D.B. pull	最大夾持力 kN(kgf) Max. clamping force	最高迴轉數 min <sup>-1</sup> (r.p.m) Max. speed	I kg·m <sup>2</sup>	重量 kg Weight	適用迴轉缸 Matching cyl.	最大使用壓力 Max. pressure Mpa (kgf/cm <sup>2</sup> )	
2M-05	15	10.9	135	14	6.5(660)	11 (1120)	4500	0.02	6.0	RK-75(N)	1.8(18)
2M-06	20	14.5	165		14.3(1460)	24 (2450)	4000	0.04	12.2	RK-100(N)	2.0(20)
2M-08	23	16.7	210	17	19.6(2000)	36.6 (3730)	3500	0.13	23.0	RK-125(N)	1.9(19.3)
2M-10	27	19.6	254	22	26.1(2660)	49.3 (5030)	3000	0.30	34.3	RK-150(N)	1.8(18.6)
2M-12	30	21.8	304	26	36(3670)	66(6730)	2500	0.71	59.1		2.4(24)

寸法 Size 型號 Model	A	B	C (H6)	D	E	G max.	G min.	H	J
2M-05	135	55	80	100	7	6	-9	35	28
2M-06	165	74	140	104.8	5	101.5	81.5	36	34
2M-08	210	85	170	133.4		129	106		38
2M-10	254	89	220	171.4		160	133		45
2M-12	304	106			6	70	40	46	50

寸法 Size 型號 Model	K	L	L1	M	N	P	Q max.	Q min.	R max.	R min.	S	T
2M-05	M12x1.75	4~M8	14	31	62	14	17.0	5.5	32.9	27.45	25	10
2M-06	M16x2	6~M10		37	73	20	17.6	7.0	38.7	31.4	31	12
2M-08	M20x2.5	6~M12	20	38	95	25	22.8	8.8	47.5	39.1	35	14
2M-10		6~M16	18	43	110	30	33.0	12.8	53.9	44.1	40	16
2M-12				51	130		47.8	13.3	62.5	51.6	50	21

POWER CHUCK