



精短整合型注水迴轉油壓缸 (二)

COMPACT STYLE HYDRAULIC CYLINDER WITH COOLANT CONNECTION AND SAFETY DEVICE

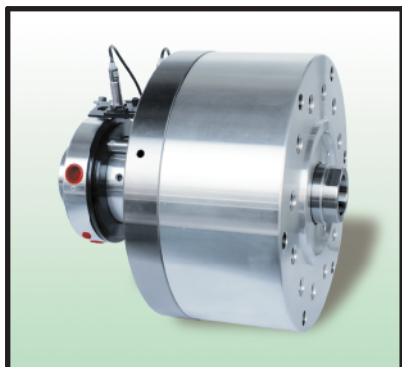

- 高速, 輕量整合型注水迴轉油壓缸, 可經由後端迴轉繼手供給切削水, 特別適合使用於立式車床。
- 內建逆止閥自鎖機構, 洩壓閥及行程控制近接開關。
- 安裝時可由後端鎖固之。
- For short form, light weight and high speed rotary cylinder. To allow coolant to be feed from the rear end of the distributor through the rotating union, suitable for vertical lathe.
- Built-in safety check valves, pressure relief valves and proximity sensor.
- Can screw it from the rear end of the cylinder when mounting.
- 洩油孔配管務必單獨接回油壓槽, 以避免產生背壓。
- The drain port should be independently connected to oil tank to avoid back pressure.

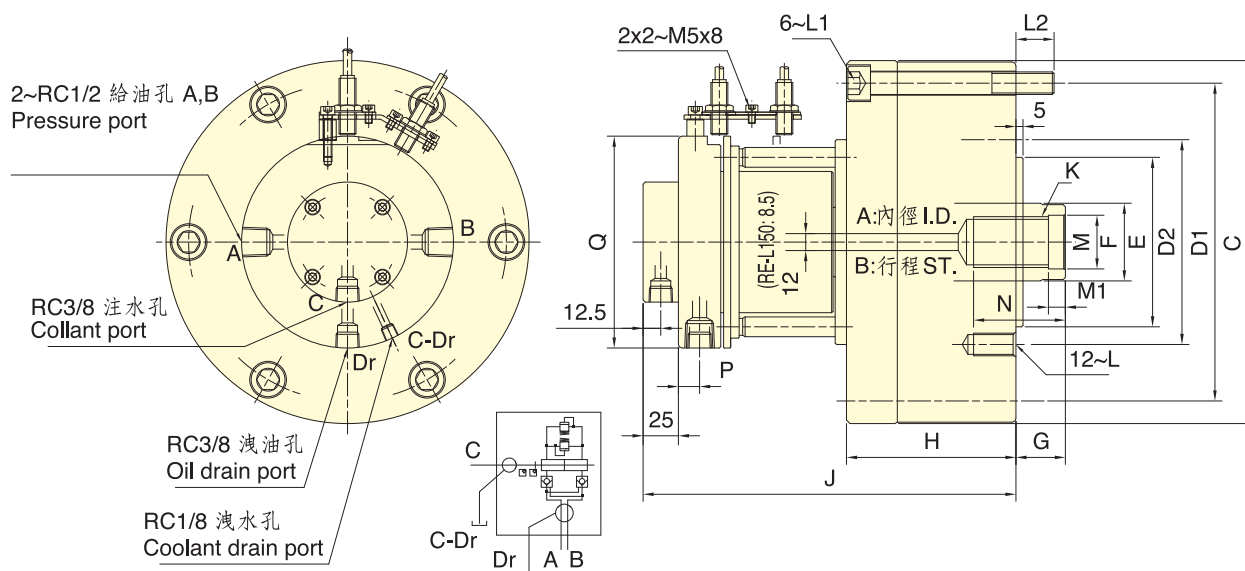

保留規格修改的權利
Subject to technical changes.

近接開關型式:

Proximity sensor: Model TLX-12N02E1-C (KFPS) DC 12~24V 200mA NPN

規格 Spec.	活塞面積 Eff. piston area cm ²		行程 mm Piston stroke	最高迴轉數 min ⁻¹ (r.p.m) Max. speed	最高使用壓力 MPa Max. pressure (kgf/cm ²)	注水部最高使用壓力 MPa Coolant connection Max. pressure (kgf/cm ²)	I kg·m ² Moment of inertia	重量 kg Weight
	伸側 Extend	拉側 Retract						
RE-L150	174.4	160.8	30	5500	4.0 (40)	1.5 (15)	0.06	15.2
RE-L200K	292.4	274.9	35					
RE-L200L		265.4	50	4000	5.0 (50)		0.21	30.7
RE-L250	465.2	438.2	60	2000			0.43	47.5

寸法 Size 型號 Model	A	B	C	D1	D2	E	F	G		H	J	K	L	L1	L2	M	M1	N	P	Q
						h7		max.	min.						H8					
RE-L150	150	30	205	180	130	110	45	60	30	99	201	M30x3.5	M12x24	M12X105	18.5	32	10	50	12.5	114
RE-L200K	195	35	257	225	145	120	55	70	35	120	264	M36x4.0	M16x30	M16X130	38	45				
RE-L200L		50			170	125	65	80	30	135	279	M42x3.0		M20x35	M16X145		27	28		
RE-L250	245	60	307	275	220	160		85	25	165	305				M16X175					