


# 行程控制型迴轉油壓缸

## ROTATING HYDRAULIC CYLINDER WITH STROKE CONTROL



- 短型，高速，行程控制型迴轉油壓缸。
- 感應式近接開關，行程調整容易，可確認油壓缸正確作動。
- 安裝時可由後端鎖固之。
- For short form, high speed and stroke control.
- To ensure safe power chuck operations by conforming movement of the piston in the cylinder.
- Can screw it from the rear end of the cylinder when mounting.
- 洩油孔配管務必單獨接回油壓槽，以避免產生背壓。
- The drain port should be independently connected to oil tank to avoid back pressure.

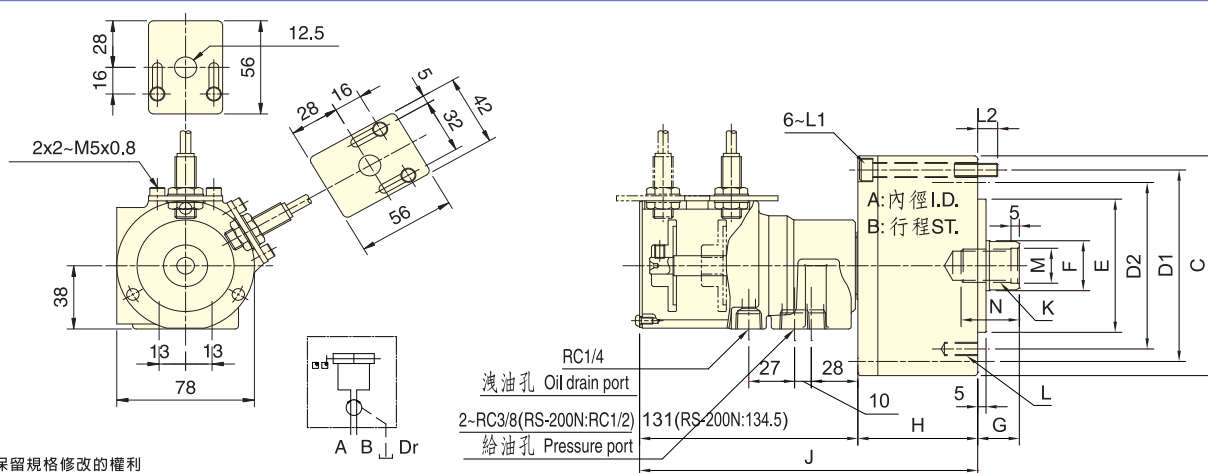

保留規格修改的權利  
Subject to technical changes.

### 近接開關型式：

Proximity sensor : Model TLX-12N02E1-C(KFPS) DC 12~24V 200mA NPN

規格 Spec.	活塞面積 Eff. piston area cm <sup>2</sup>		行程 mm	最高迴轉數 min <sup>-1</sup> (r.p.m)	最高使用壓力 MPa	I kg·m <sup>2</sup>	重量 kg			
	押側 Extend	拉側 Retract						Piston stroke	Max. speed	Max. pressure (kgf/cm <sup>2</sup> )
RS-6520N	32.0	28.3	20	6000	4.0 (40)	0.01	3.2			
RS-6530N			30					3.3		
RS-75N	43.0	37.1	15				5500	0.04	4.8	
RS-7530N			30							3.7
RS-100N	77.4	71.5	20	5500	12~M12x24	M10x100	16	31	45	
RS-125N	121.6	113.1	25							7.3
RS-150N	175.6	160.8	30							10.6
RS-200N	313.0	290.4	35							15.9

寸法 Size	A	B	C	D1	D2	E	F	G		H	J	K	L	L1	L2	M	N										
								max.	min.									h7	H8								
RS-6520N	65	20	97	80	60	25	45	25	62	193	M16x2.0	6~M8x16	M6x70	14.5	17	30											
RS-6530N		30															203	M6x80									
RS-75N	75	15	107	90	65	30	45	30	57	188	M20x2.5	6~M10x20	M8x60	12	21	35											
RS-7530N		30															72	203	M8x75								
RS-100N	100	20	132	115	100	80	55	75	25	82	213	M24x3.0	6~M12x20	M8x85	16	31	45										
RS-125N	125	25	160	140	130	110												35	50	95	226	M30x3.5	12~M12x24	M10x100	16	31	45
RS-150N	150	30	190	170	110	110												45	55	95	226	M30x3.5	12~M12x24	M10x100	16	31	45
RS-200N	200	35	245	220	145	120												55	75	35	115	249.5	M36x4.0	12~M16x30	M10x125	21	37